

GRAPHITE COUNTRY

Application	Available	Recommended for Interior Use	Recommended for Exterior Use
Full Bed Depth Veneer (±4")	Yes	Yes	Yes
Thin Veneer (±1")	Yes	Yes	Yes
Thin Veneer Corners	Yes	Yes	Yes

ASTMs

ASTM C-97 • Absorption & Bulk Specific Gravity

Water Absorption %	.31
Bulk Specific Gravity	2.83

ASTM C-99 • Modulus of Rupture

Parallel to Rift, Dry	3,770 psi
Parallel to Rift, Wet	3,500 psi







ASTM C-170 • Compressive Strength


Parallel to Rift, Dry	36,100 psi
Parallel to Rift, Wet	32,000 psi
Perpendicular to Rift, Dry	35,800 psi
Perpendicular to Rift, Wet	30,000 psi

ASTM C-880 • Flexural Strength

Perpendicular to Rift, Dry	1,780 psi
Perpendicular to Rift, Wet	1,730 psi

SPECIFICATIONS

 100% SPLIT FACE
 PATTERN Dimensional Ashlar Random Ashlar
 HEIGHT Varies from 2"-9" (Thin Veneer: 2"-6")
 LENGTH Random, from 8"-36" (Thin Veneer: 8"-24")
 COVERAGE Full Bed Depth Veneer: 35-40 Square Feet Per Ton
 COLOR Light to dark gray and graphite tones

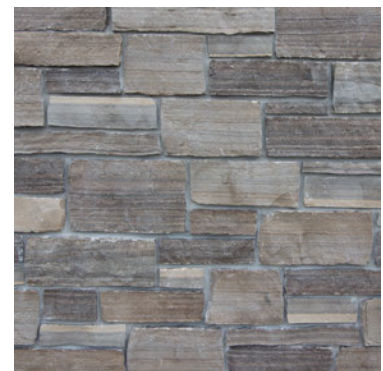

GOLD FABRICATOR
 ANSI/NSC 373-2013
 C0289215-101



GOLD QUARRIER
 ANSI/NSC 373-2013
 C0290908-101