

HAMILTON DIMENSIONAL

Application	Available	Recommended for Interior Use	Recommended for Exterior Use
Full Bed Depth Veneer (±4")	Yes	Yes	Yes
Thin Veneer (±1")	Yes	Yes	Yes
Thin Veneer Corners	Yes	Yes	Yes

ASTMs

ASTM C-97 • Absorption & Bulk Specific Gravity

Water Absorption %	1.60
Bulk Specific Gravity	2.54







ASTM C-170 • Compressive Strength


Parallel to Rift, Dry	15,100 psi
Parallel to Rift, Wet	13,200 psi
Perpendicular to Rift, Dry	15,100 psi
Perpendicular to Rift, Wet	14,400 psi

ASTM C-99 • Modulus of Rupture

Parallel to Rift, Dry	3,770 psi
Parallel to Rift, Wet	3,500 psi
Perpendicular to Rift, Dry	1,780 psi
Perpendicular to Rift, Wet	1,730 psi

SPECIFICATIONS

	60% BEDFACE, 40% SPLIT FACE
	PATTERN Dimensional Ashlar Random Ashlar
	HEIGHT Dimensional: 2.25" • 5" • 7.75" • 10.5"
	LENGTH Random, from 8"-48" (Thin Veneer: 8"-24")
	COVERAGE Full Bed Depth Veneer: 35-40 Square Feet Per Ton
	COLOR Buff, white and tan hues

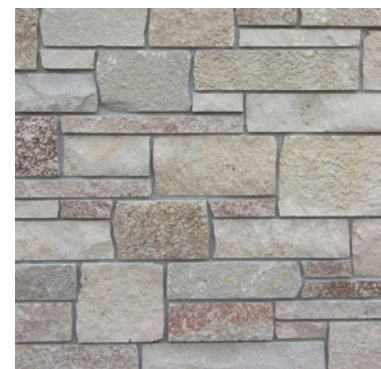

GOLD FABRICATOR
 ANSI/NSC 373-2013
 C0289215-101



GOLD QUARRIER
 ANSI/NSC 373-2013
 C0290908-101